



CONVERTER ETHERNET RS-232/RS-485 Z-KEY

Z-KEY 以太网转换器 RS-232/RS-485

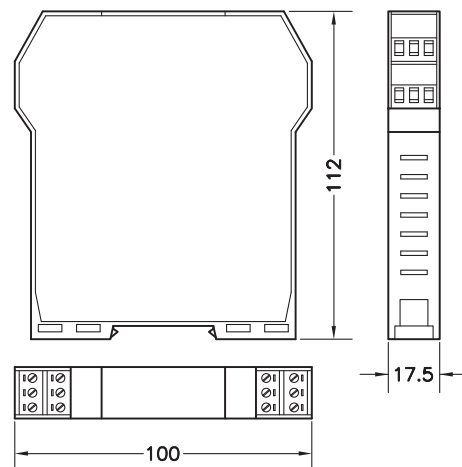

Dimensions in mm.
单位: mm

Transport weight: 0.14 kg
重量: 0.14 kg

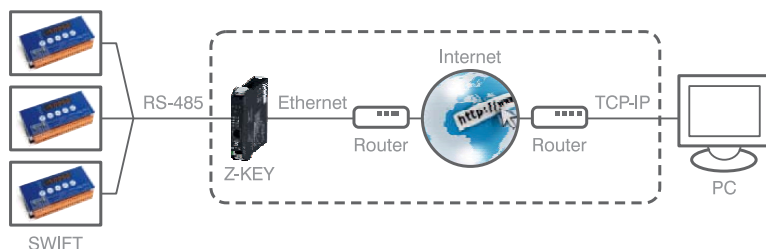

Z-KEY is an adapter that allows to easily communicate RS-232 / RS-485 serial devices to an Ethernet network and gives solution to Bridge and Gateway communication for ModBus TCP-IP - Modbus RTU. Allows configuration through USB or through Webserver.

Ethernet adapter for SWIFT, MATRIX II, SMART, DP 100 and DAT400/500.

Z-KEY 转换器可以轻松连接RS-232/RS-485系列设备至以太网，并且带来ModBus TCP-IP至ModBus RTU的网桥和网关解决方案。

转换器可通过USB或网络服务器进行配置

以太网转换器适用于: SWIFT, MATRIX II, SMART, DP 100 和 DAT 400/500。

SPECIFICATIONS	
Power Supply	11..40V DC 19..28V AC (50-60Hz)
Consumption	1.5W (24V DC), 2W (24V AC)
Operating Temperature	-10 °C..+50 °C
Storage Temperature	-20 °C..+85 °C
Protection degree	IP20
Installation	35 mm DIN Rail
Connections	Removable terminal block
Dimensions	17.5x100x112 mm
Serial Port	RS-232 / RS-485 (switchable)
Ethernet Port	Fast Ethernet 10/100 Mbit/s with RJ45 connector
USB Port	Micro USB (only for device configuration)
Working mode	Remote Serial Port on RS-232/RS-485 Bridge Modbus TCP-IP - Modbus RTU Gateway Modbus TCP-IP - Modbus RTU

技术条件	
电源	11..40V DC 19..28V AC (50-60Hz)
功耗	1.5W 24V DC), 2W (24V AC)
工作温度	-10 °C..+50 °C
存放温度	-20 °C..+85 °C
防护等级	IP20
安装	35 mm DIN 导轨
连接	可移除式连接端子
尺寸	17.5x100x112 mm
设备接口	RS-232 / RS-485 (可切换)
以太网接口	高速以太网 10/100 Mbit/s
USB接口	配 RJ45 接口 Micro USB (只适用于设备配置)
运作模式	远程系列接口对 RS-232/RS-485 网桥 Modbus TCP-IP - Modbus RTU 网关 Modbus TCP-IP - Modbus RTU