
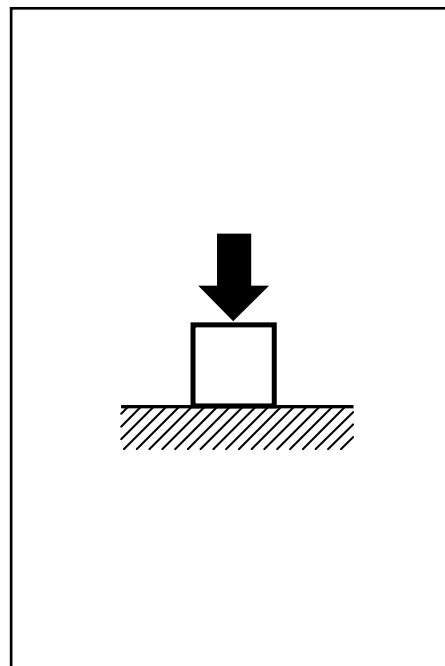


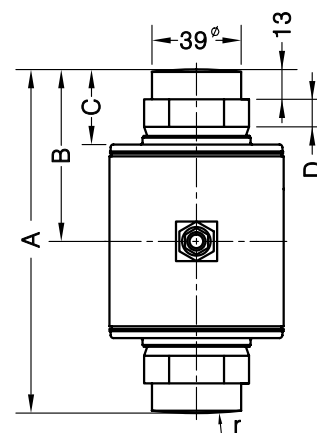

- Compression load cell, selfcentering column
- 3000 divisions OIML R60 class C
- Simple to install
- Stainless Steel construction
- Hermetically welded, protection class IP 68 (EN 60529) and IP 69K (ISO 20653)
- Pre-corner adjustment optimized for multicell systems
- Lightning protection
- Applications: High capacity weighing systems, truck scales
- 压式称重传感器，自复位弹性体
- 3000 分度 OIML R60 C级
- 安装简单
- 不锈钢制造
- 完全焊接密封，防护等级IP68(EN 60529)和IP69K(ISO 20653)
- 对于使用多只传感器的系统，易于调校
- 防雷击保护
- 应用范围：大量程称量系统，汽车衡

Model 型号	Nominal capacity 量程 Ln	Accuracy class 准确度等级 n. OIML	Minimum division 最小分度值 vmin	Safe load limit 安全载荷 200 % Ln	Breaking load 极限载荷 > 350 % Ln
730 30 t 730 40 t	30 t 40 t	3000 3000	2 kg 2.67 kg	60 t 80 t	> 105 t > 140 t

[illegible]

称重传感器材质为不锈钢。安装附件材质为镀锌合金钢。

Dimensions in mm. 单位: mm.

“感应”：传感器与仪表一起使用时，增加两条感应线，以保证传感器供桥电压的稳定；电缆较长及温度范围较大时，更应使用。

屏蔽：不与传感器外壳连接。

1929