


TENSION ACCESSORIES FOR MODEL 300

MOD.300拉式安装附件

Acc. 30901

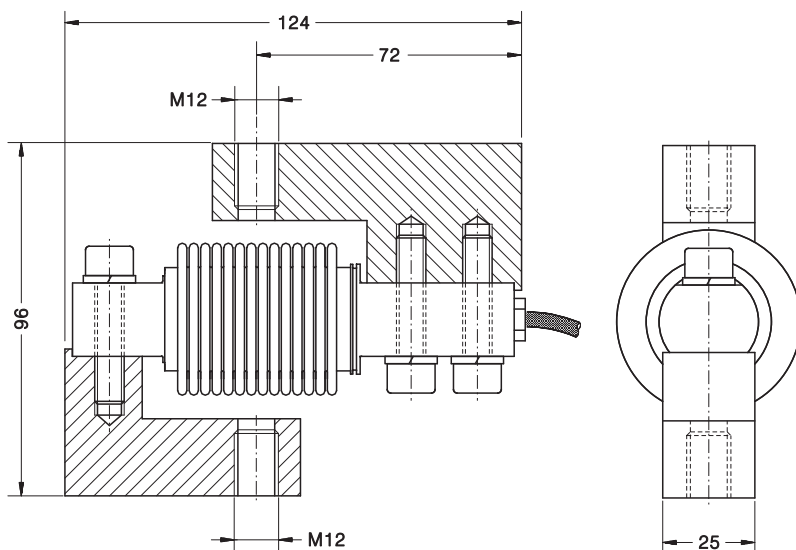


- Material: Alloy steel zinc-plated
- 材质: 合金钢镀锌

Dimensions in mm. 单位: mm

Transport weight - 重量: 0.8 kg


Acc. RO12x1.75

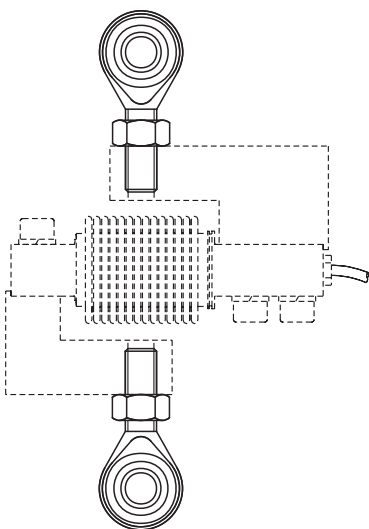

Alloy steel zinc-plated
合金钢镀锌

Transport weight - 重量: 0.4 kg

Mod. 300 + Acc. 30901 + Acc. RO12x1.75

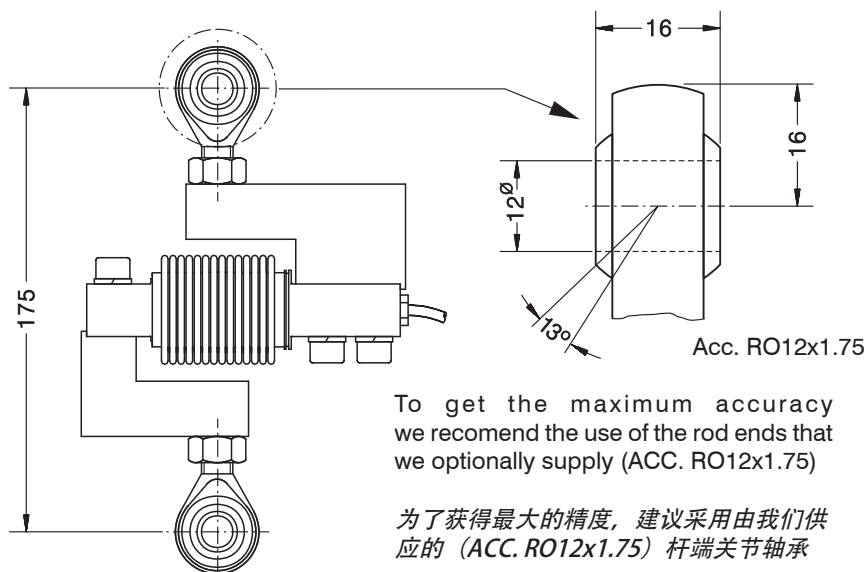

To get the maximum accuracy we recommend the use of the rod ends that we optionally supply (ACC. RO12x1.75)

为了获得最大的精度, 建议采用由我们供应的 (ACC. RO12x1.75) 杆端关节轴承

ACCESSORIES FOR MODEL 300

MOD.300安装附件





Acc. **30904**: Silent-block bearing up to 50 kg (blue rubber) / 橡胶减震器 (蓝胶) 最高承重 50 kg

Acc. **30905**: Silent-block bearing up to 300 kg / 橡胶减震器最高承重 300 kg

Acc. **30906**: Silent-block bearing up to 500 kg / 橡胶减震器最高承重 500 kg

Stainless Steel / 不锈钢

50/300/500 kg max.

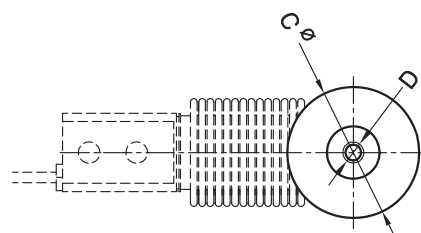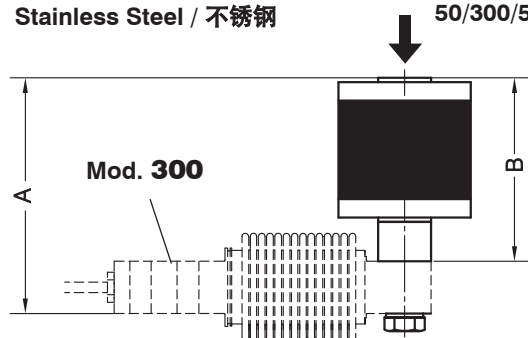


Accessory 附件	A	B	CØ	D
30904-30905	90	70	50	M8
30906	100	80	70	M12


Transport weight - 重量: 0.5 kg

Acc. **30903**: Base plate: Steel zinc-plated / 底板: 合金钢镀锌

Acc. **30903i**: Base plate: Stainless Steel / 底板: 不锈钢

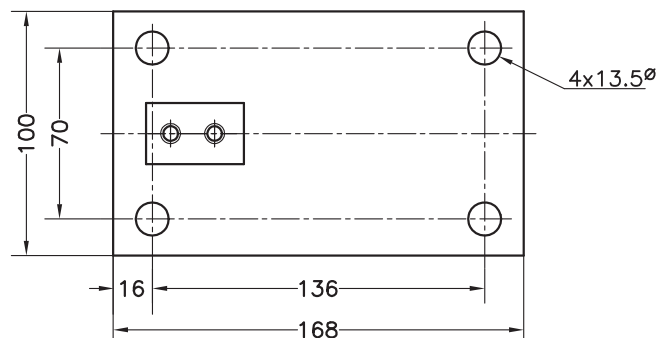

Mod. 300

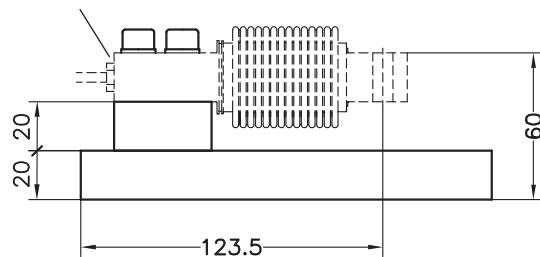

Dimensions in mm. 单位: mm

Transport weight - 重量: 3 kg

MOUNTING-KIT LIFT-OFF PREVENTION FOR MOD. 300

适用于料斗的带限位的安装附件MOD.300

■ **Material:**





Alloy steel zinc-plated **Acc. 30907**

Stainless Steel **Acc. 30907i**

■ **材质:**

合金钢镀锌 **Acc. 30907**

不锈钢 **Acc. 30907i**

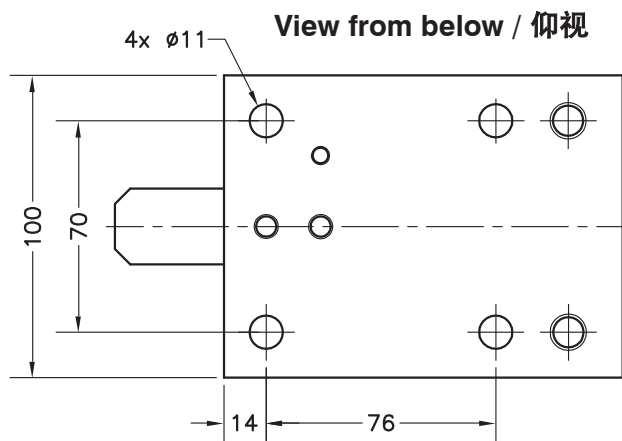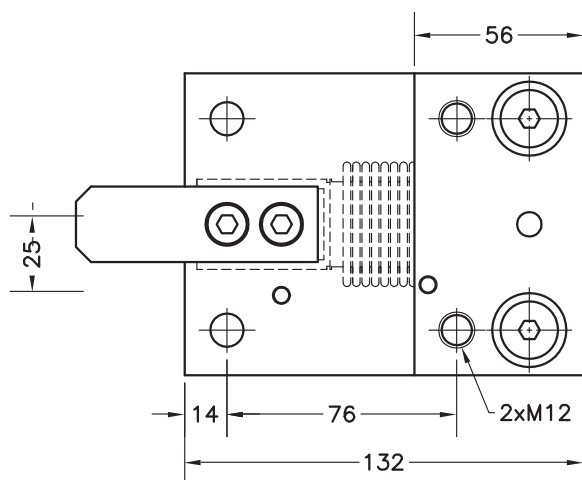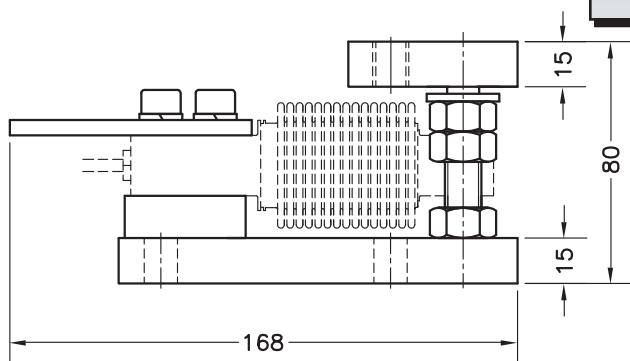

Accessory 附件	Nominal load 量程	A	B	C	D	E	F	G	H	I	J	Transport weight 重量
35907	0.3...2 t	94	168	100	70	16	136	20	15	15	1	5 kg
35907i	3...5 t	113	212	120	84	18	175	25	18	18	-	8.5 kg

	Alloy steel zinc-plated / 合金钢镀锌	Stainless Steel / 不锈钢
	30907	30907i
Maximum permissible offset transverse to load cell 称重传感器最大横向位移	±2.5 mm	±2.5 mm
Maximum lift-off force 最大倾翻力	40.46 kN	40.46 kN
Maximum force horizontal to load cell 最大横向力	2.53 kN	1.58 kN

Dimensions in mm. 单位: mm

Transport weight - 重量: 2.5 kg