
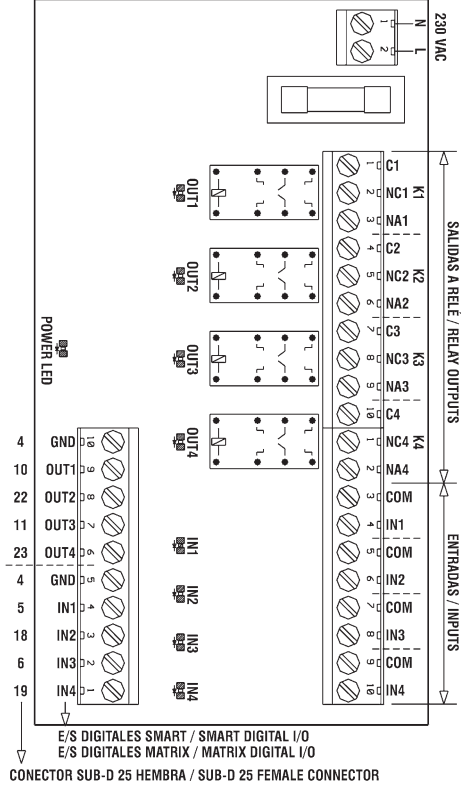


4 OUTPUT RELAYS / 4 INPUTS FOR SMART 4路输入输出转接器--SMART用

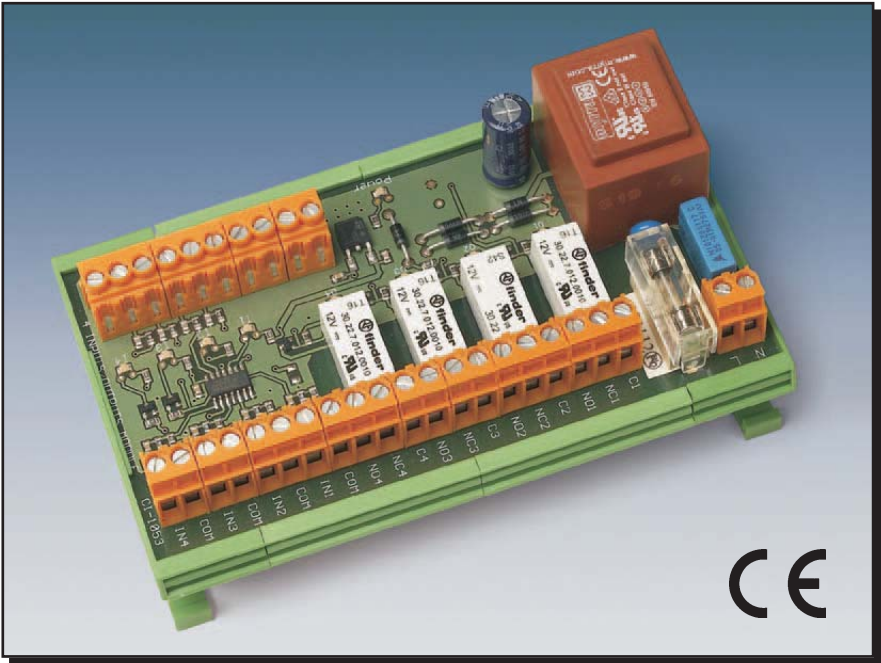

This module is a conversion unit that directly connects the logical inputs and outputs of the Smart indicator and provides the user with 4 contact inputs and 4 relay outputs as well as the necessary power supply.

这个模块是一款直接连接在SMART显示器上的逻辑输入输出转换部件，同时支持连接4路输入、4路继电器输出和电源。

TECHNICAL SPECIFICATIONS		技术规格
POWER Input voltage Fuse Consumption	230 V AC 50/60 Hz 250 V, 100 mA 2.4 W	供电 输入电源 保险丝 功耗
OPERATING CONDITIONS Operating temperature Range Storage Temperature limits	-25 °C / +50 °C -25 °C / +70 °C	工作条件 工作温度 存放温度
INPUTS AND OUTPUTS Inputs: Maximum Voltage Relay Outputs	24 V DC 125 V AC / 1A 30 V DC / 1A	输入和输出 输入：最高电压 继电器输出
MECHANICAL CHARACTERISTICS Size Weight	136 x 82 x 57 mm 0.2 kg	机械特性 尺寸 重量