



LOAD CELL CABLE

Extension cable with 6 wires (senses), keeping same color code than the load cells.

PVC, shielded, 6 wires 0.25 mm², diameter 6 mm.


称重传感器电缆

延长线内部有6根线，每根线的颜色和称重传感器保持一致

PVC材料，带保护，6*0.25 mm²，直径6 mm.

89009 Coil/线圈 20 m
Trans. Weight/重量: 0.25 kg

89010 Coil/线圈 100 m
Trans. Weight/重量: 5.15 kg

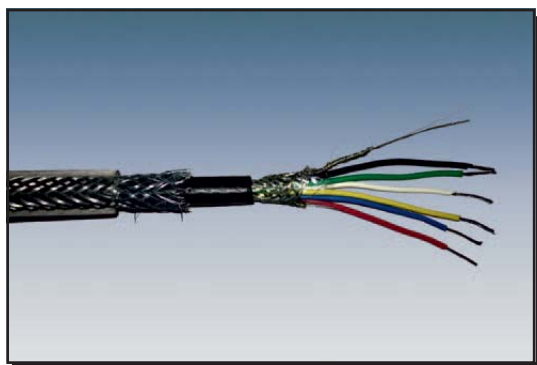

ARMoured RODENT PROTECTION LOAD CELL CABLE

Extension cable with 6 wires (senses), keeping same color code than the load cells.

Coated with galvanized steel mesh for rodent protection and exterior transparent jacket. Additional protection to abrasion and EMI/RFI interferences.

Internal: Black PVC, shielded, 6 wires 0.25 mm², diameter 6 mm.

External: Transparent PVC, armored galvanized steel, diameter 9 mm.

高强度防啃咬保护传感器电缆

延长线内部有6根线，每根线的颜色和称重传感器保持一致

透明线缆包裹的内部有坚固的金属网用来防护啃咬带来的伤害。同时还带有额外的EMI/RFI抗干扰能力。

内部: 黑色PVC, 带保护, 6*0.25 mm²，直径6 mm.

外部: 透明PVC, 镀锌铜, 直径 9 mm.

89134 Coil/线圈 20 m
Trans. Weight/重量: 1.97 kg

89135 Coil/线圈 50 m
Trans. Weight/重量: 4.92 kg

89136 Coil/线圈 100 m
Trans. Weight/重量: 9.84 kg

89143 Coil/线圈 200 m
Trans. Weight/重量: 19.68 kg



ISOLATOR GEL KIT FOR JUNCTION BOXES


89072 600 ml two-part encapsulation isolator to fill the junction box, protecting from ingress and condensing water.

Transport weight: 1 kg

绝缘凝胶—接线盒用

89072 600 ml 两瓶分开装的绝缘凝胶可用来填补(或封装)接线盒, 以此来保护来自进水和水凝结的伤害。

重量: 1 kg

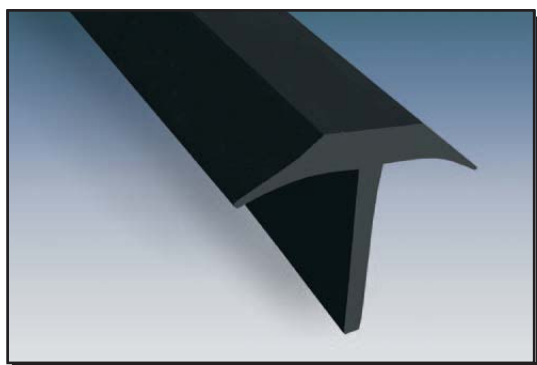

T-SHAPE RUBBER PROFILES

89289 The 3 metres T-Shape rubber profiles are used in pit-type truck scales to prevent sand, dirt, snow, etc. from entering the pit. Easy to install. Reduces maintenance costs.

Transport weight: 4.1 kg

T字形橡胶

89289 3米长的T字形橡胶适用于凹式的汽车衡, 可用来阻绝沙尘、粉尘、雪等。从凹处放入, 极易安装。同时可降低维护费用。

重量: 4.1 kg